



TS 43 E, TS 4 VP

Drying cabinets for smaller spaces

TS 43 E and TS 4 VP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23,4 inches) wide. TS 43 E holds 6 kg (13,2 lbs) of laundry and TS 4 VP holds 4 kg (8,8 lbs) of laundry. They are equipped with an extendible hanging system which simplifies the laundry operation.

The drying cabinets are equipped with automatic programs. Choose a program and the drying cabinet will do the rest. It switches off when the laundry is dry. TS 43 E also has three manually timed programs. TS 4 VP uses heat pump technology for an even more efficient and gentle drying.

Details

- Capacity 6 kg (13,2 lbs) resp. 4 kg (8,8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,6 resp. 1,2 kWh
- Compact design
- Control panel with display
- Automatic programs
- Timed drying - TS 43 E
- Calibration program for automatic drying based on installation environment - TS 43 E
- ECO+ program without heat
- Extendible hanging system
- The door can be ordered right or left hanged
- Overheat protection
- Three door bars as standard - TS 43 E
- Two glove holders as standard - TS 4 VP
- Touch buttons - TS 4 VP
- 5 selectable languages - TS 4 VP

Main Data	TS 43 E	TS 4 VP
Capacity, kg/lbs	6 (13,2)	4 (8,8)
Hanging length, m (ft)	16 (52,5)	16 (52,5)
Heating effect, kW	2,0	-
Part no	131044	131040
Consumption data, normal temperature		
Drying time, min	85	90
Drying capacity, g/min	25	22

*Drying of 4 kg (8,8 lbs) cotton (dry weight) washed and high-spinned.

About PODAB


PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

Contact us


PODAB's head office, warehouse, workshop and export department are situated in Gothenburg, Sweden. If you have any questions, please feel free to contact us at +46 31-752 01 00. You can also read more about us at www.podab.com.

Drying Cabinet		TS 43 E	TS 4 VP
Electrical connections	Phase/Voltage/Frequency	1~N/230V/50-60Hz	1~N/230V/50-60Hz
	Total effect, kW	2,04	0,9
	Fuse, A	10	10
	Cable length, mm (inch)	2400 (94,5)	2500 (98,4)
Air connections	Outlet exhaust, Ø mm (inch)	100 (3,93)	-
	Outlet air flow, m³/h (ft³/h)	95 (3355)	-
Heat pump	Condensate pipe, Ø mm (inch)	-	13 (1/2)
	Refrigerant	-	R407C
	Amount of refrigerant, g (oz)	-	300 (10,6)
Optional extras	Air exchanger 1 vent., part no	141009	-
	Air exchanger 2 vent., part no	141018	-
Sound level	Airborne sound level, dB(A)	55	52
Weight	Net, kg (lbs)	60 (132)	94 (207)
	Shipping data net, kg (lbs)	65 (143)	100 (220)

TS 43 E

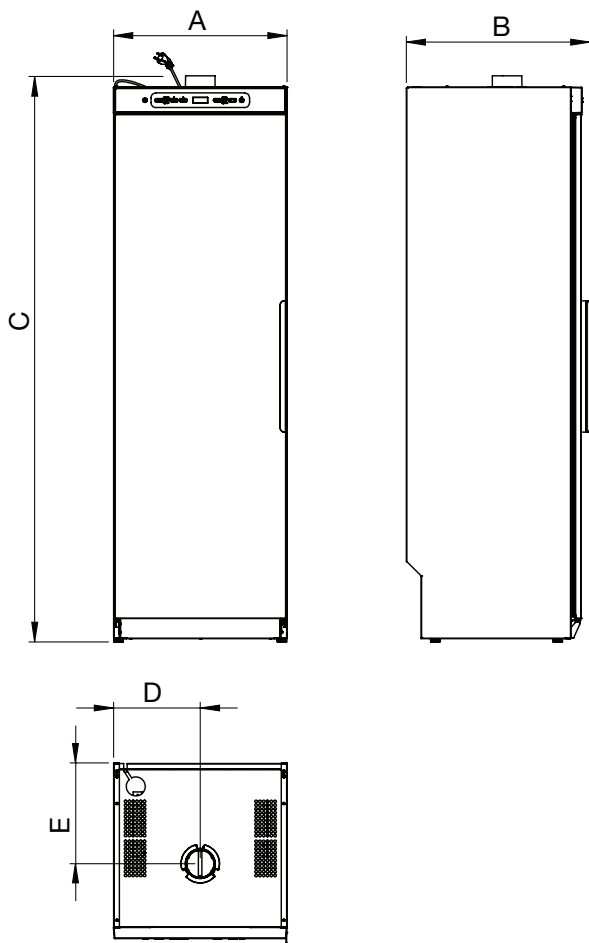

TS 4 VP

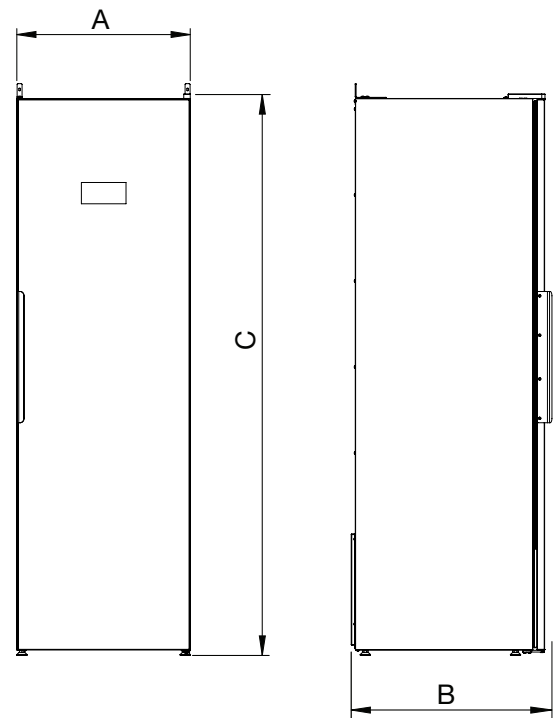

Dimensions, mm (inch)	A	B	C	D
	Width	Depth	Height	Pos. of evacuation from back
TS 43 E	595 (23,4)	641 (25,2)	1939 (76,3)	100 (3,9)
TS 4 VP	595 (23,4)	688 (27)	1925 (75,8)	-



2020-03-25. Changes can be made without prior notice.