



## TS 63 VP

### Energy Efficient Drying Cabinet

ProLine TS 63 VP is a new, unique drying cabinet with a heat pump. It has a very low energy consumption of 1,7 kWh.

The drying cabinet is equipped with a Humidity Tracking System (HTS) which senses the humidity level and stops the drying process when the laundry is dry.

Drying cabinets are ideal for drying delicate garments that should not be tumble dried. ProLine TS 63 VP dries efficiently without friction which extends the life-span of the garments. The drying cabinet is equipped with four automatic programs.

### Details

- Capacity 8 kg (17,6 lbs)
- Hanging length 16 m (52,5 ft)
- Width, 120 cm (47 inch)
- HTS - Humidity Tracking System
- Gentle drying mode
- Four automatic programs and one program for timed drying
- Hanging rail rotates out 180° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered semi-mounted with top packed as an assembling kit (art no 131031)
- Full assembling kit (cabinet flat-packed) as an optional extra (art no 131039)

Main Data	TS 63 VP
Capacity, kg (lbs)	8 (17,6)
Hanging length, m (ft)	16 (52,5)
Part no	131031
Consumption data, normal temperature*	
Drying time, min	58-150
Energy consumption, kWh	1,7
Drying capacity, g/min (oz/min)	45 (1,59)

\*Drying of 8 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0% residual moisture.

### About PODAB

PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

### Contact us


PODAB's head office, warehouse, workshop and export department are situated in Gothenburg, Sweden. If you have any questions, please feel free to contact us at +46 31-752 01 00. You can also read more about us at [www.podab.com](http://www.podab.com).

Drying Cabinet		TS 63 VP
<b>Electrical connections</b>	Phase/Voltage/Frequency	3~N/400V/50Hz
	Total effect, kW	1,7
	Fuse, A	10
	Cable length, mm (inch)	2100 (82,7)
<b>Heat Pump</b>	Drain pipe, ø mm (inch)	26 (1,02)
	Refrigerant, type	R407C
	Refrigerant, g (oz)	1125 (40)
<b>Optional extras</b>	Single bar, art no	131070
	Hook rack, set of three, part no	131071
	Assembling kit, art no	131039
<b>Sound level</b>	Airborne sound level, dB(A)	56
<b>Weight</b>	Net, kg (lbs)	165 (364)
	Shipping data net, kg (lbs)	180 (397)
<b>Ceiling height</b>	Minimum ceiling height, mm (inch)	2050 (80,7)

Front

Left side

From above

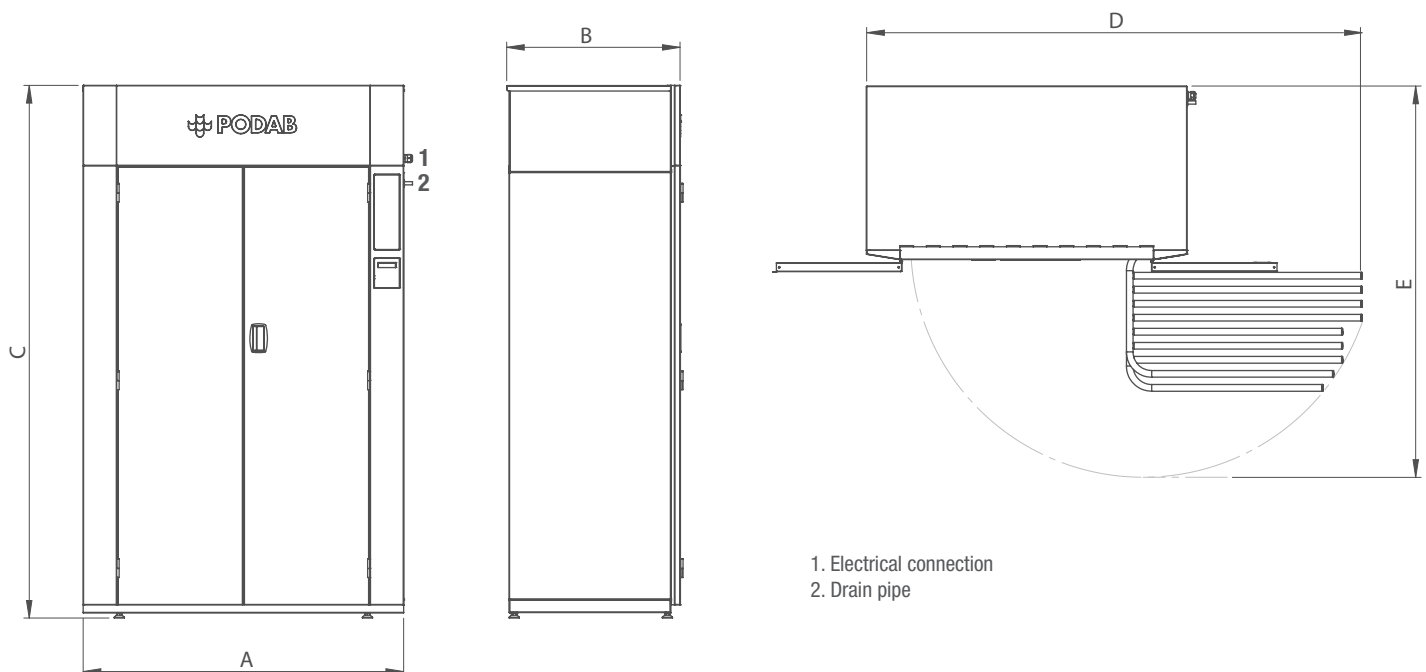

Dimensions in mm (inch)	A	B	C	D	E
	Width	Depth	Height	Width with hanging rail	Depth hanging rail
<b>TS 63 VP</b>	1200 (47,2)	650 (25,6)	1955 (77)	1857 (73,1)	1465 (57,7)



2022-10-17. Changes can be made without prior notice.