



SPEED QUEEN | PROFESSIONAL

Washer-Extractor & Dryer for Vend

SFC

SDC

Best-in-class Quantum® Gold Controls


Revolutionary Quantum technology combines equipment controls, programming and wireless networking into one full-store management system, including: wireless networking, adjustable water levels, “lucky cycle” feature, time of day pricing, customizable cycle modifiers, and in-depth reporting. Designed to reduce costs and maximize revenue, Quantum gives you the power to achieve unprecedented levels of profitability.

Washer-extractors features

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Totally freestanding: can be installed on any floor and any level
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Door opens 180° for easy loading and unloading
- Coin boxes and coin mechanisms available as an option
- Top, Front and side panels standard available in anthracite grey or in Stainless steel front & top panels.
- Electrical heating or boiler-fed
- Soap supply injection allows easy connection with liquid soap pumps
- Longer lifetime: at least 15,000 cycles

Quantum Controls

- 6 programs
- 3 cycle modifiers
- LED notification
- Programmable by Infra Red
- Time remaining countdown



Dryers features

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading
- Coin boxes and coin mechanisms available as an option
- Top, Front and side panels standard available in anthracite grey or in Stainless steel front & top panels.
- Electrical or gas heating



Quantum Controls

- 4 drying programs
- LED notification
- Programmable by Infra Red
- Digit display
- Time remaining countdown



Connectivity

Wi-fi connectivity via accessory, enabling access to Speed Queen Insights and Speed Queen App.



Washer-extractor

Specifications



SFC							
	MARKET	ACTUATION	VOLTAGE	CONTROL LOCATION	COLOR	BASKET	DRAIN
SF3JXASP403UG01	Europe/CE	Prep for coin	400v/50Hz/3N	10° front control	Grey	Stainless	Pump
SF3JXASP403UN01	Europe/CE	Prep for coin	400v/50Hz/3N	10° front control	Stainless	Stainless	Pump
SF3JXASG403UG01	Europe/CE	Prep for coin	400v/50Hz/3N	10° front control	Grey	Stainless	Gravity drain
SF3JGBSP403UN01	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Stainless	Stainless	Pump
SF3JGBSP403UG01	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Stainless	Stainless	Gravity drain
SF3JGBSP403UG01	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Grey	Stainless	Pump
SF3JGBJP403UG43 ³	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Grey	Stainless	Pump
SF3JGBSG403UG01	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Grey	Stainless	Gravity drain
SF3JGBJG403UG43 ³	Europe/CE	OPL ¹ / PCP ²	400v/50Hz/3N	45° front control	Grey	SS w/ injection	Gravity drain


¹ OPL On Premise Laundry

² Prep for Central Pay

³ Soap Supply System

Washer Extractor		
DRUM VOLUME	l	96,8
CAPACITY	kg	9,5
TYPE OF CONTROL		Quantum
MOTOR		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL HEATING		
Electrical	kW	4,8
TYPE OF CONTROL		Quantum
DIMENSIONS		
H×W×D	mm	1126×683×704
Net weight	kg	119
TRANSPORT DATA		
Volume (packed)	m ³	0,77
Packed H×W×D		1150x760x860
Gross weight	kg	128
Ratio 1:9	kg	10,5

Models Equipped With Drain Hose

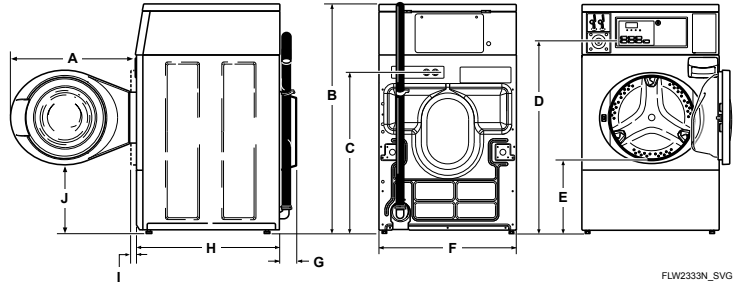

FLW2333N_SVG

	A	B	C	D	E	F	G	H	I	J
mm	610	1126	813	938	371	683	52	704	40	333

Dryer

Specifications




SDC							
	MARKET	ACTUATION	HEATING	VOLTAGE	CONTROL LOCATION	COLOR	BASKET
SDGNXAGS303UG01	Europe/CE	Prep for coin	Gas	230v/50Hz/1	10° front control	Grey	Galvanized
SDGNXAGS303EG01	UK	Prep for coin	Gas	230v/50Hz/1	10° front control	Grey	Galvanized
SDGNBGS303UG01	Europe/CE	OPL ¹ / Prep CP ²	Gas	230v/50Hz/1	45° front control	Grey	Galvanized
SD3NXAGS403UG01	Europe/CE	Prep for coin	Electric	400v/50Hz/3N	10° front control	Grey	Galvanized
SD3NXAGS403UN01	Europe/CE	Prep for coin	Electric	400v/50Hz/3N	10° front control	Stainless	Galvanized
SDENXAGS303UG01	Europe/CE	Prep for coin	Electric	230v/50Hz/1	10° front control	Grey	Galvanized
SD3NGBGS403UN01	Europe/CE	OPL ¹ / Prep CP ²	Electric	400v/50Hz/3N	10° front control	Stainless	Galvanized
SDENBGS303UG01	Europe/CE	OPL ¹ / Prep CP ²	Electric	230v/50Hz/1	45° front control	Grey	Galvanized
SD3NGBGS403UG01	Europe/CE	OPL ¹ / Prep CP ²	Electric	400v/50Hz/3N	45° front control	Grey	Galvanized
SDEJXAGS553UG16	Europe/CE	OPL ¹ / Prep CP ²	Electric	220v/60Hz/1N	10° front control	Grey	Galvanized

¹ OPL On Premise Laundry

² Prep for Central Pay

		Dryer
DRUM VOLUME	l	198
CAPACITY	kg	8,2
TYPE OF CONTROL		Quantum
ELECTRICAL HEATING	kW	5,3 (400V)
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25
BASKET		Galvanize
DIMENSIONS		
H×W×D	mm	1126x683x711
Net weight	kg	68
TRANSPORT DATA		
Volume (packed)	m ³	0,77
Packed H×W×D		1150x760x860
Gross weight	kg	79
Ratio 1:19	kg	10,5

Electric Models

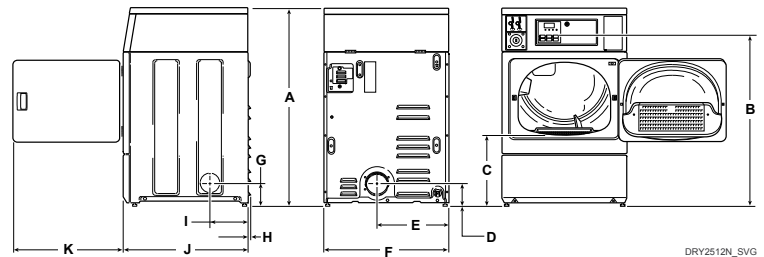

DRY2512N_SVG

	A	B	C	D	E	F	G	H	I	J	K
mm	1126	938	392	102	391	683	114	10	203	711	597